

Pyroguard Rapide

• EW30 Impact

EN14449 LAMINATED SAFETY GLASS




Classification: EW

Reduces the amount of radiant heat transfer to below 15 kW/m² on the unexposed side.

EW30 IMPACT

ANNEALED GLASS

INTERLAYER

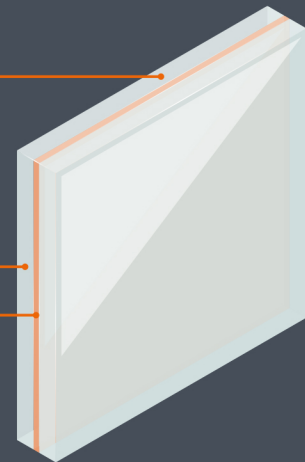

Fire resistance
EW30



Cuttability
glass



Weight
17 kg/m²



Sound reduction
33 dB



Impact resistance
2B2



Light transmission
90%



Temp range
-20°C/+80°C

CHARACTERISTICS	EW30 IMPACT
FIRE RESISTANCE (EN 13501-2)	EW30
GLASS PRODUCTION SIZE MIN - MAX (mm)	100 x 100 1580 x 2780
THICKNESS AND TOLERANCE (mm)	7 (-0.6/+0.8)
WEIGHT (kg/m ²)	17
R _w (C;Ctr) SOUND REDUCTION (EN 140-3)	33 (-2;-3)
T _v LIGHT TRANSMISSION (EN 410) (%)	90
U _g VALUE (EN 673) W/m ² K	5.7
g VALUE (EN 410)	0.83
TEMPERATURE RANGE (°C)	-20/+100
IMPACT RESISTANCE (EN 12600)	2B2
UV STABILITY (EN ISO 12543-4)	✓
CE/UKCA CERTIFICATE OF CONFORMITY	0336-CPR-9134

